




Extremely versatile and easy manoeuvrable.  
This machine offers a cost-effective choice for  
loading and unloading applications.

## **ECONOLOADER**

- Standard penetration of at least 2metres.  
To achieve greater penetration into vehicle add  
sections of lightweight gravity conveyor from the  
OCON speedtrack range.

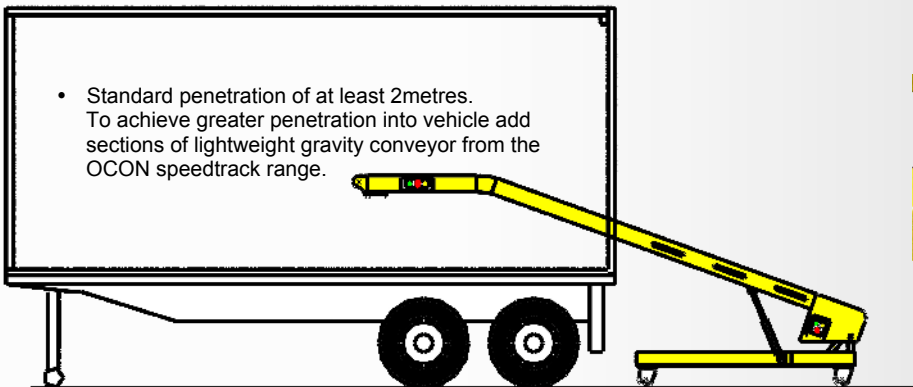

- Manual hydraulic adjustment


Owens Conveyor Company.  
Westgate House,  
Westgate, Aldridge,  
WS9 8EX England.

Tel: +44 (0) 1922 452333

Fax: +44 (0) 1922 458777

Web: [www.ocon.co.uk](http://www.ocon.co.uk)

email: [info@ocon.co.uk](mailto:info@ocon.co.uk)

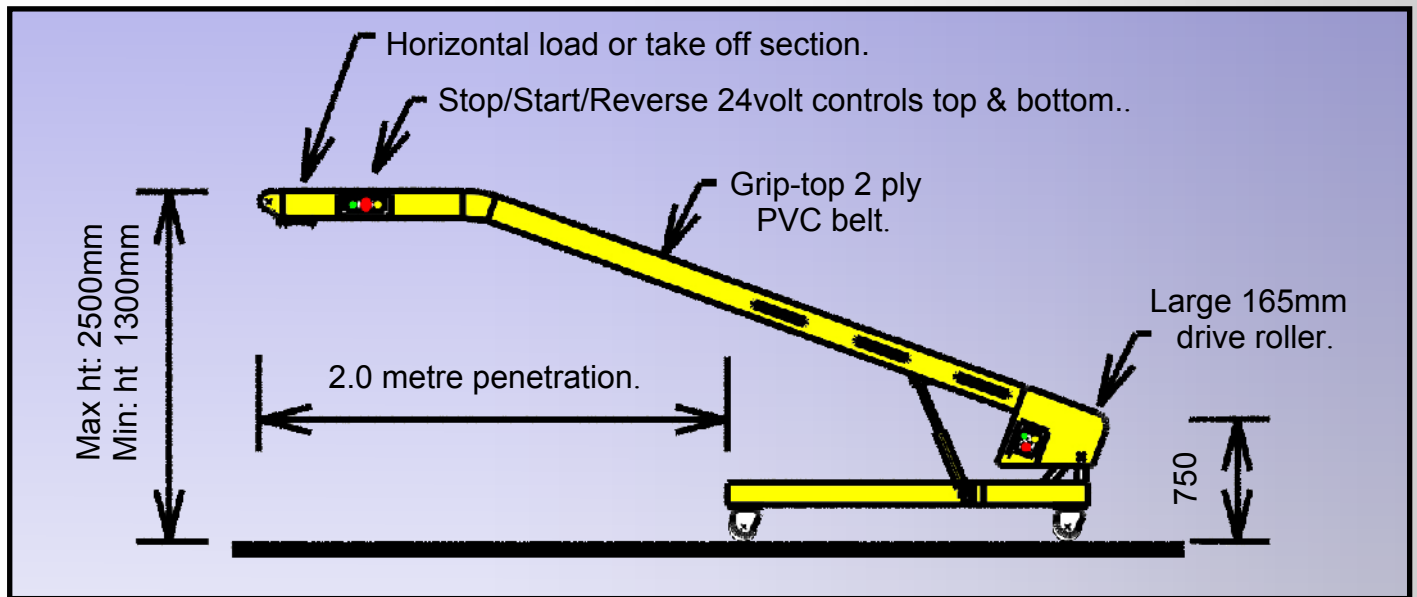

## Construction / Specifications

- Standard widths: 400mm & 600mm.
- Belt material: Two ply, high grip PVC.
- Belt speed: Fixed speed belt @ 20 metres per minute
- Chassis construction: Heavy gauge fabricated hollow steel section. Fixed and swivel castors for strength and manoeuvrability
- Boom construction: Folded steel flat slider bed design. Handles either side for ease of movement. Fully underguarded and all turning rollers shrouded.
- Drive motor gearbox: 0.37kw flange mounted gearbox. Motor mounted below pivot.
- Electrical supply: Electrical 240volt 1 phase supply. (As standard)
- Controls: Stop/Start/Reverse located top and bottom. 24volt IP65 controls.
- Finish: Yellow powder coated RAL1003.
- Height adjustment: Manual hydraulic hand pump and cylinder.